

AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)


25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY







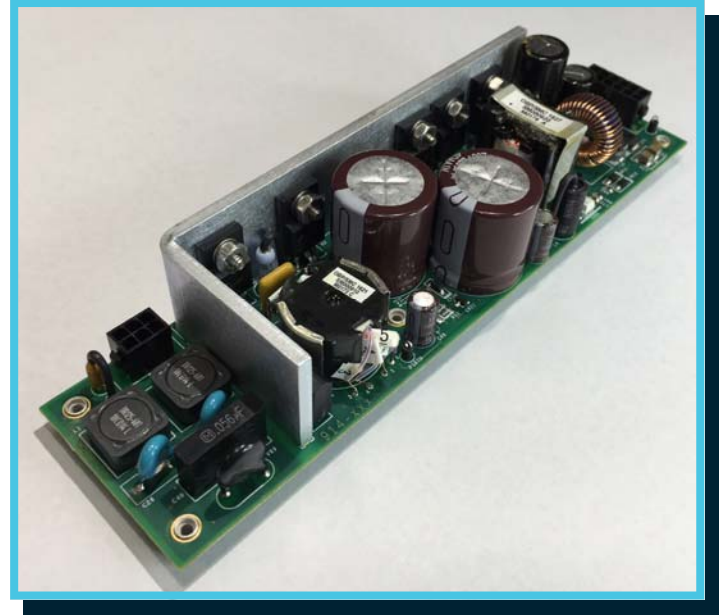




Providing two isolated output voltages and up to 25W continuous output power, the **AC25W-12V-PBF** is optimized for 115Vac/ 47-800Hz single phase RTCA/DO-160G airborne applications. It meets the most stringent airborne requirements including those for variable frequency 115Vac generator systems over the wide frequency range of 360-800Hz and RTCA/DO-160G category M emissions. The **AC25W-12V-PBF** is capable of providing up to 25W output during momentary input AC interrupt conditions for greater than 200mSec.

Weighing less than 8 ounces, the **AC25W-12V-PBF** is constructed on a multi-layer PWB occupying $\sim 12\text{in}^2$. Component height is less than 1" and the supply contains five press fit nuts for easy mounting. Interconnection is accomplished using two vertical TE connectors. The **AC25W-12V-PBF** is designed and manufactured to stand-up to the harsh operating environments encountered in today's aircraft installations.



FEATURES

	Efficiency: 74% typical at full rated output load
	Wide input range: 97 – 134Vac, 47-800Hz
	Inrush current limiting: < 3.7Apk
	Size: 6.70" x 1.75" x 1.1"; Weight: less than 8 ounces
	Two isolated DC outputs: +12V (switched), +5Vstby (unswitched)
	Independent over-current and over-voltage protection on each output
	Output DC valid status line (TTL)
	Over-temperature fault signal (TTL)
	MTBF: 847,457 Hours, RIAC 217Plus, Aic category, 50°C L-bracket temp, 65%DC, 2190 Cycles/ year

AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)

25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY
















STANDARD OUTPUTS

PARAMETER	OUTPUT VOLTAGE	
	+12V	+5Vstby
Voltage Regulation	12.1V \pm 2%	5.0V \pm 3%
Output Current	1.88A	500mA
Maximum Load	22.5W	2.5W
Minimum Load	0A	0A
Pk-pk Ripple + Noise (20MHz)	< 120mVpp	< 50mVpp
Overcurrent Trip Point	2.2A (2.75A Max)	500mA (600mA Max)
Notes	1, 2	1, 2

Notes:

1. Fold back current limited
2. Any combination of 12V current (up to 2.1A) and 5V current (up to 500mA) adding up to 25W of total output power can be drawn from the supply

APPLICABLE SPECIFICATIONS

	RTCA/DO-160G, section 4, altitude/ temperature (operating) to 15,000 feet, category A1 equipment
	RTCA/DO-160G, section 6, humidity (operating) category A
	RTCA/DO-160G, section 7, shock (operating) category S, curve C
	RTCA/DO-160G, section 8, vibration (operating) category S, curve C
	RTCA/DO-160G, section 15, magnetic effect, category B
	RTCA/DO-160G, section 16, power input requirements for AC input, cat A(WF) equip, includes harmonic distortion
	RTCA/DO-160G, section 17, voltage spike, category B equipment
	RTCA/DO-160G, section 18, conducted susceptibility, category Z equipment
	RTCA/DO-160G, section 19, induced signal susceptibility, category Z equipment
	RTCA/DO-160G, section 20, conducted and radiated susceptibility, category T equipment
	RTCA/DO-160G, section 21, conducted and radiated emissions, category M equipment, with external power line EMI
	Operating temperature: -25°C to +70°C, no forced air required
	Storage temperature: -55°C to +100°C



AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)

25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY



INTERCONNECTION

SUPPLY SIDE CONNECTORS AND PIN-OUTS

Connector	J1	J2
Pin #	TE Vertical 3-794630-6	TE Vertical 4-794630-2
1	n/c	n/c
2	Chassis Gnd	DCRTN
3	n/c	DCRTN
4	Line	DCRTN
5	n/c	+12Vout
6	Neutral	DCGOOD-L
7	--	n/c
8	--	OUTPUTEN-L
9	--	DCRTN
10	--	OVERTEMP-L
11	--	+12Vout
12	--	+5Vstby



AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)


25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY



EFFICIENCY CURVE

DATA RECORDED USING THE FOLLOWING TEST CONDITIONS: $T_a = 25^{\circ}\text{C}$. CONSTANT ACTIVE LOAD APPLIED TO OUTPUTS, $V_{in} = 115\text{Vrms}/400\text{Hz}$, 5Vstby loaded to 200mA for all test points.

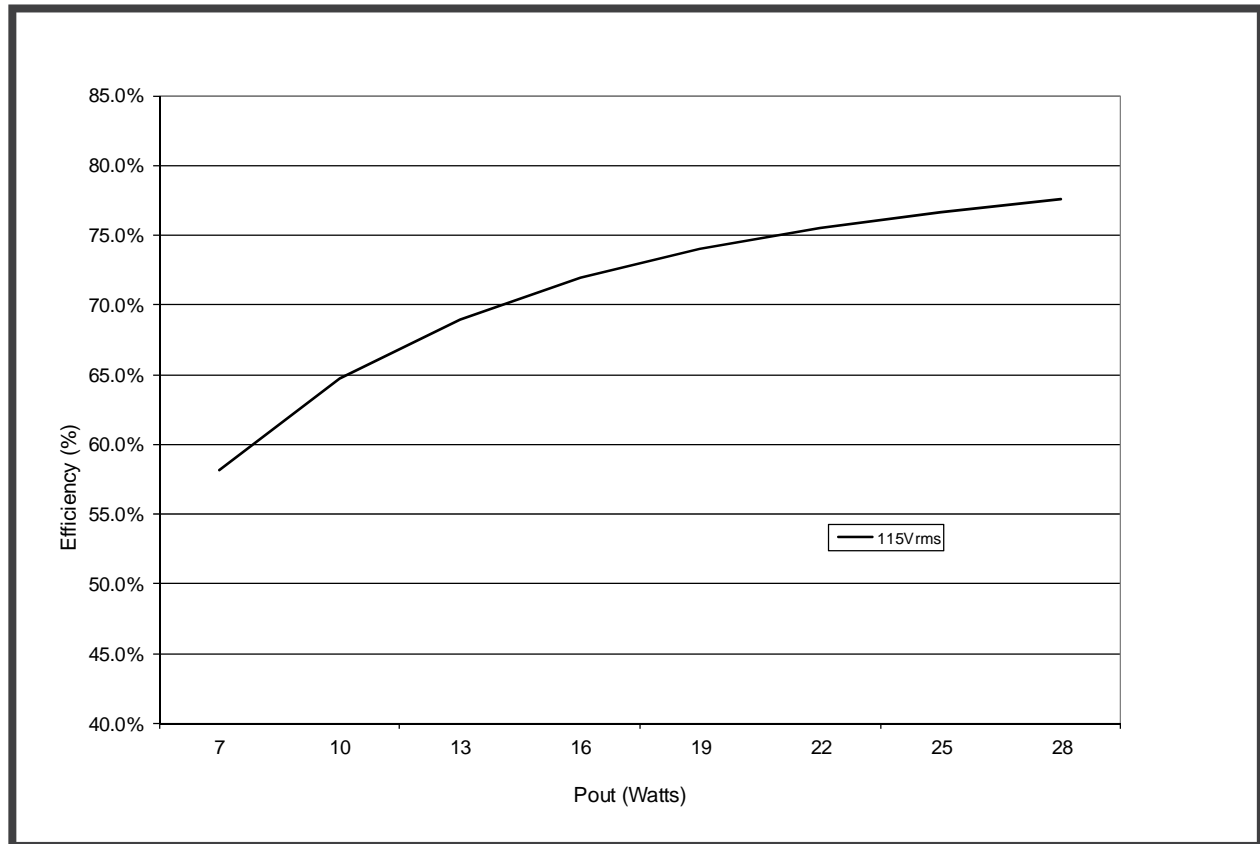

AC25W-12V-PBF


(115Vac, 47-800Hz INPUT)

25W/12Vdc, 5Vdc DUAL OUTPUT


115Vac INPUT PFC POWER SUPPLY



MECHANICAL DIAGRAMS

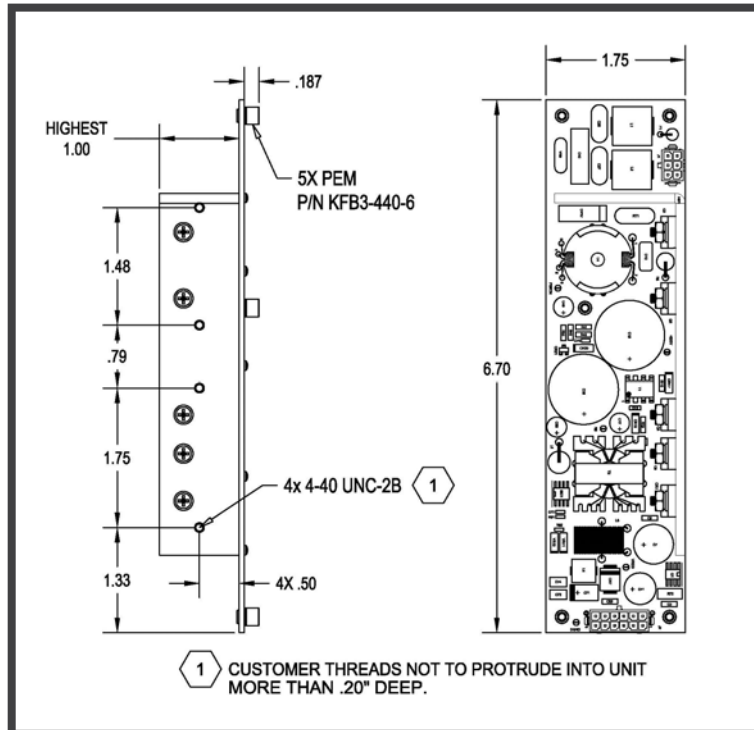

TOP AND SIDE VIEWS

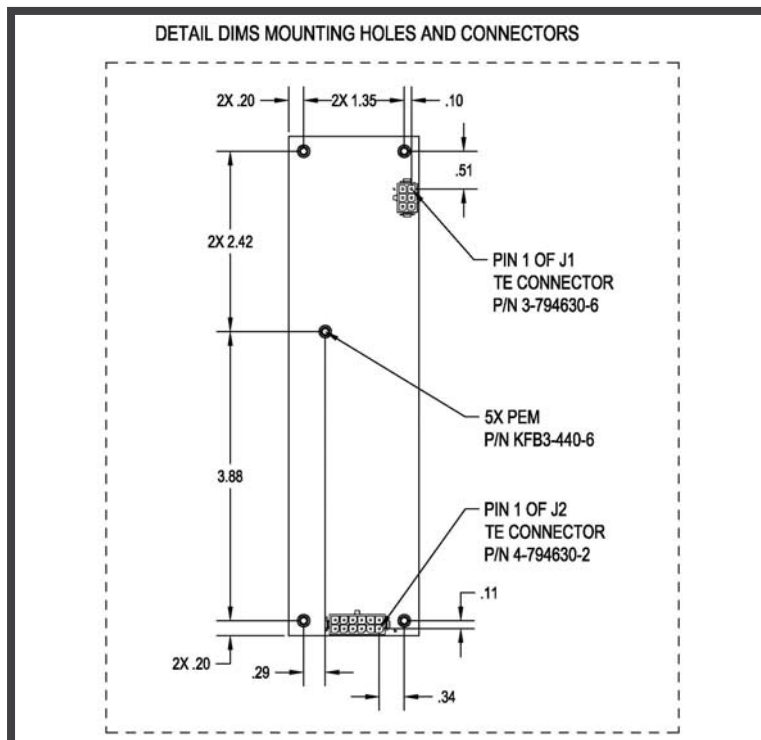

MOUNTING AND CONNECTORS

OUTLINE OR DETAILED SOLIDWORKS DRAWING FURNISHED UPON REQUEST



AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)

25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY



ELECTRICAL SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED THE FOLLOWING TEST CONDITIONS APPLY: Ta = 25°C. CONSTANT ACTIVE LOAD APPLIED TO OUTPUTS, Vin = 115Vrms/ 400Hz.

INPUT CHARACTERISTICS

PARAMETER	AC25W-12V-PBF	REMARKS	NOTES
INPUT VOLTAGE RANGE	97 – 134Vrms	Complies with normal/ abnormal input voltages for AC operation per RTCA/DO-160G, Section 16, Category A	2
MUST START VOLTAGE	97Vrms minimum	Supply will start and remained enabled for input voltage in the range of 97Vrms < Vin < 134Vrms.	2
INPUT FREQUENCY RANGE	47 – 800Hz	Reduced distortion performance below 360Hz.	2
EFFICIENCY (FULL LOAD)	74% typical	Full rated output load (25W)	2
INPUT CURRENT	295mArms at 115Vrms	Full rated output load (25W)	1
INRUSH CURRENT	<3.7Apk	Cold Start	2
CREST FACTOR (CURRENT)	1.314 – 1.514	Ratio of peak / RMS.	1
POWER FACTOR	0.98 min 0.98 min	Pout > 15W at 400Hz Pout > 20W at 800Hz	2
START-UP TIME	<1000mSec	Outputs within regulation	2
CONDUCTED EMISSIONS	RTCA/DO-160G, Section 21	Category M equipment	1
QUIESCENT POWER	2.2W typical	Outputs Enabled, Pout = 0W	2
TOTAL HARMONIC DISTORTION (INPUT CURRENT)	< 5.5%	18W-25W output load	2
INDIVIDUAL HARMONICS AC CLEAN INPUT	EVEN: <1% If / n (n < 10) EVEN: <0.1%If (n ≥ 10) ODD: <30% If / n ODD TRIPLES:<15% If /n	If = Fundamental current Vthd < 1.25%, n = order of harmonic (1 - 40) 18W-25W output load Harmonics < 10mA disregarded	1



AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)

25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY



INPUT CHARACTERISTICS—CONTINUED

PARAMETER	AC25W-12V-PBF	REMARKS	NOTES
INDIVIDUAL HARMONICS DISTORTED INPUT	EVEN: $<1\% I_f / n + 1.25V_n$ ($n < 10$) EVEN: $<0.1\% I_f + 1.25V_n$ ($n \geq 10$) ODD: $<30\% I_f / n + 1.25V_n$ ODD TRIPLENS: $<15\% I_f / n + 1.25V_n$	I_f = Fundamental current $V_{thd} > 10\%$ (clipped method) n = order of harmonic (1 - 40) V_n = corr input voltage harmonic 18W-25W output load Harmonics < 10mA disregarded	1
STORAGE TEMPERATURE RANGE	-55°C TO +100°C	Non operational	1
OPERATING TEMPERATURE RANGE	-25°C TO +70°C	No external airflow required	1
OUTPUTEN-L	Pull to <2Vdc with respect to DCRTN in order to enable the +12V output	Internally pulled high to 5Vstby through 5.1k pull-up resistor. Pull to <2Vdc with respect to DCRTN in order to enable +12V output. 5Vstby output is unaffected by this signal	1

OUTPUT CHARACTERISTICS

PARAMETER	AC25W-12V-PBF	REMARKS	NOTES
RATED OUTPUT POWER	25W	Continuous	2
OUTPUT VOLTAGE TOLERANCE	+12.1V \pm 2% +5.0V \pm 3%	See "STANDARD OUTPUTS" table	2
TEMPERATURE STABILITY COEFFICIENT	0.01% / °C	Maximum output voltage drift with temperature	1
OUTPUT RIPPLE + NOISE (pk-pk)	<120mVpp: +12Voutput <50mVpp: +5Vstby output	20MHz Bandwidth	2
MINIMUM OUTPUT LOAD	0A	No minimum load is required for proper output regulation.	2
LINE REGULATION	<0.5%	Individual output deviation for $\pm 20\%$ step change in input voltage	1
LOAD REGULATION (TRANSIENT LOAD RECOVERY)	Outputs remain within regulation limits	50% to 100% step change in individual output load currents	1
HOLD-UP TIME	200mSec min @ Pout = 25W	Uninterrupted ride through for momentary power interrupt	2



AC25W-12V-PBF

(115Vac, 47-800Hz INPUT)

25W/12Vdc, 5Vdc DUAL OUTPUT

115Vac INPUT PFC POWER SUPPLY



OUTPUT CHARACTERISTICS—CONTINUED

PARAMETER	AC25W-12V-PBF	REMARKS	NOTES
ISOLATION VOLTAGE INPUT TO OUTPUT	1500Vac	No arcing or damage for 60 second test duration	1
ISOLATION VOLTAGE INPUT TO CHASSIS	1500Vac	No arcing or damage for 60 second test duration	2
DC OUTPUT STATUS “DCGOOD-L”	Transitions to TTL high (4V min) upon detection of +12V output 6% below nominal set point	Secondary side referenced (w/ respect to DCRTN), 10mSec delay time, TTL level, 1mA max source current; 16mA max sink current	2
OUTPUT OVERVOLTAGE PROTECTION (non-latching)	+12V output is limited to 108% of nominal set point	Pulse-by-pulse protection, 4mSec fault to activation delay, auto-restart	1
OUTPUT OVERVOLTAGE PROTECTION (latching)	+12V set point = 14.5V +5Vstby set point = 6.2V	Supply will shutdown and remain disabled until input AC power is recycled if OVP set points are detected internally	1
OVERTEMP-L STATUS SIGNAL	Transitions to 0.5V max level upon detecting an internal operating temperature of +100°C +/- 7°C	Supply provides status signal OVERTEMP-L that asserts low when supply PWB temperature is sensed at 100°C, with ~2°C hysteresis. OVERTEMP-L signal is secondary side referenced w/ respect to DCRTN), capable of sinking 16mA	1
PFC 200Vdc OUTPUT	200Vdc ± 3%	5W ≤ Pout < 25W.	2,3

Notes:

1. Ensured by design, not 100% tested in production.
2. 100% tested for specification compliance in production.
3. 200Vdc PFC output voltage tolerance is +/-5% for Pout < 5W.

