

MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)

55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply




Providing two isolated output voltages and up to 55W continuous output power, the **MS50W-12V-5V-PBF** modular supply is optimized for 115Vac/ 47-800Hz single phase RTCA/DO-160G airborne applications.

Standard protection features are built-in in to assure years of fault-tolerant and reliable operation in the harsh operating environments encountered in today's aircraft installations.

The **MS50W-12V-5V-PBF** is capable of providing uninterrupted ride-through at full 55W load during momentary input AC brown-out conditions for interrupts exceeding 300mSec.

Weighing less than 25 ounces, the **MS50W-12V-5V-PBF** is constructed on a multi-layer PWB occupying ~39in². Component height is less than 0.75". Interconnection is accomplished using two right angle Samtec IPBT connectors.

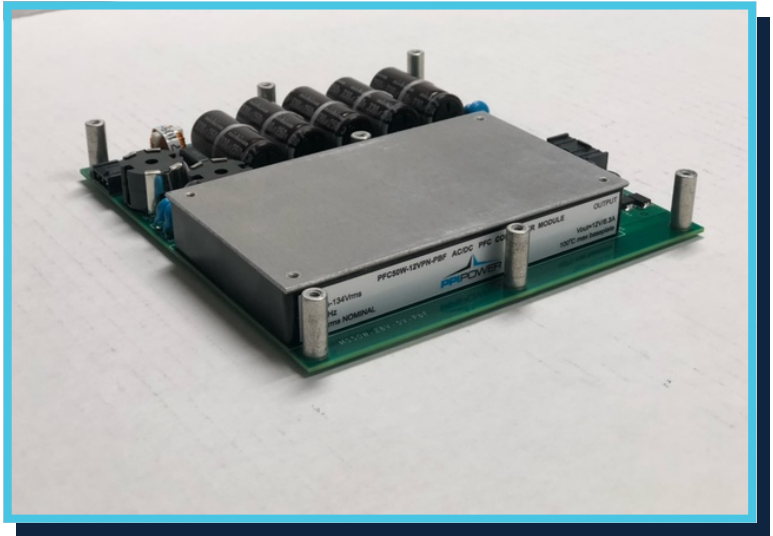

FEATURES

	Meets both RTCA/DO-160G, section 16, and Airbus ABD0100.1.8 issue D for power factor and input current harmonic distortion levels over the wide frequency operating range (360Hz – 800Hz) at 60% to full rated load
	Complies with RTCA/DO-160G for conducted emissions, susceptibility and power input (section 16)
	Efficiency: 78% typical at full rated output load
	Wide input range: 97 – 134Vac, 47-800Hz
	Active inrush current limiting: < 3Apk typical, 7Apk maximum
	Size: 6" x 6.4" x 0.75"; Weight: less than 25 ounces
	Two isolated DC outputs: +12V / 4.4A (switched), +5Vstby / 500mA (unswitched)
	Overcurrent protection with foldback current limiting for 12V output and constant current limiting for 5V out
	DC output valid status line (TTL)
	AC valid status line (TTL)
	Over-temperature protection (main module)
	MTBF: 500,000 Hours (RIAC 217Plus, Aic, 50°C operating temperature, 65% DC, 2190 Cycles/ yr.)

MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)














55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply



STANDARD OUTPUTS

PARAMETER	OUTPUT VOLTAGE	
	+12V (switched)	+5Vstby (unswitched)
Voltage Regulation	12.2V \pm 2%	5.0V +3%/-2%
Output Current	4.4A	500mA
Maximum Load	55W	2.5W
Minimum Load	0A	0A
Pk-pk Ripple + Noise (20MHz)	< 120mVpp	< 50mVpp
Overcurrent Trip-point	7A	750mA

SPECIFICATIONS

	RTCA/DO-160G, section 4, altitude/ temperature (operating) to 15,000 feet, category A1 equipment
	RTCA/DO-160G, section 6, humidity (operating) category A
	RTCA/DO-160G, section 7, shock (operating) category S, curve C
	RTCA/DO-160G, section 8, vibration (operating) category S, curve C
	RTCA/DO-160G, section 15, magnetic effect, category B
	RTCA/DO-160G, section 16, power input requirements for AC input, category A(WF) equipment
	RTCA/DO-160G, section 17, voltage spike, category B equipment
	RTCA/DO-160G, section 18, conducted susceptibility, category R(WF) equipment
	RTCA/DO-160G, section 19, induced signal susceptibility, category Z equipment
	RTCA/DO-160G, section 20, conducted and radiated susceptibility, category T equipment
	RTCA/DO-160G, section 21, conducted and radiated emissions, cate M equipment
	Operating temperature: -40°C to +70°C, forced air required at elevated ambient temperature
	Storage temperature: -55°C to +100°C



MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)

55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply



INTERCONNECTION

SUPPLY SIDE CONNECTORS AND PIN-OUTS

Connector	P1	P2
Pin #	SAMTEC P/N IPBT-103-H1-T-S-RA-K	SAMTEC P/N IPBT-105-H1-T-D-RA-K
1	LINE	+12Vout
2	CHASSIS GROUND	DCRTN
3	NEUTRAL	DCRTN
4	--	ACPF-L
5	--	DCPF-L
6	--	+12Vout
7	--	+12Vout
8	--	DCRTN
9	--	OUTPUTEN-L
10	--	+5Vstby


MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)

55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply



MECHANICAL DIAGRAM

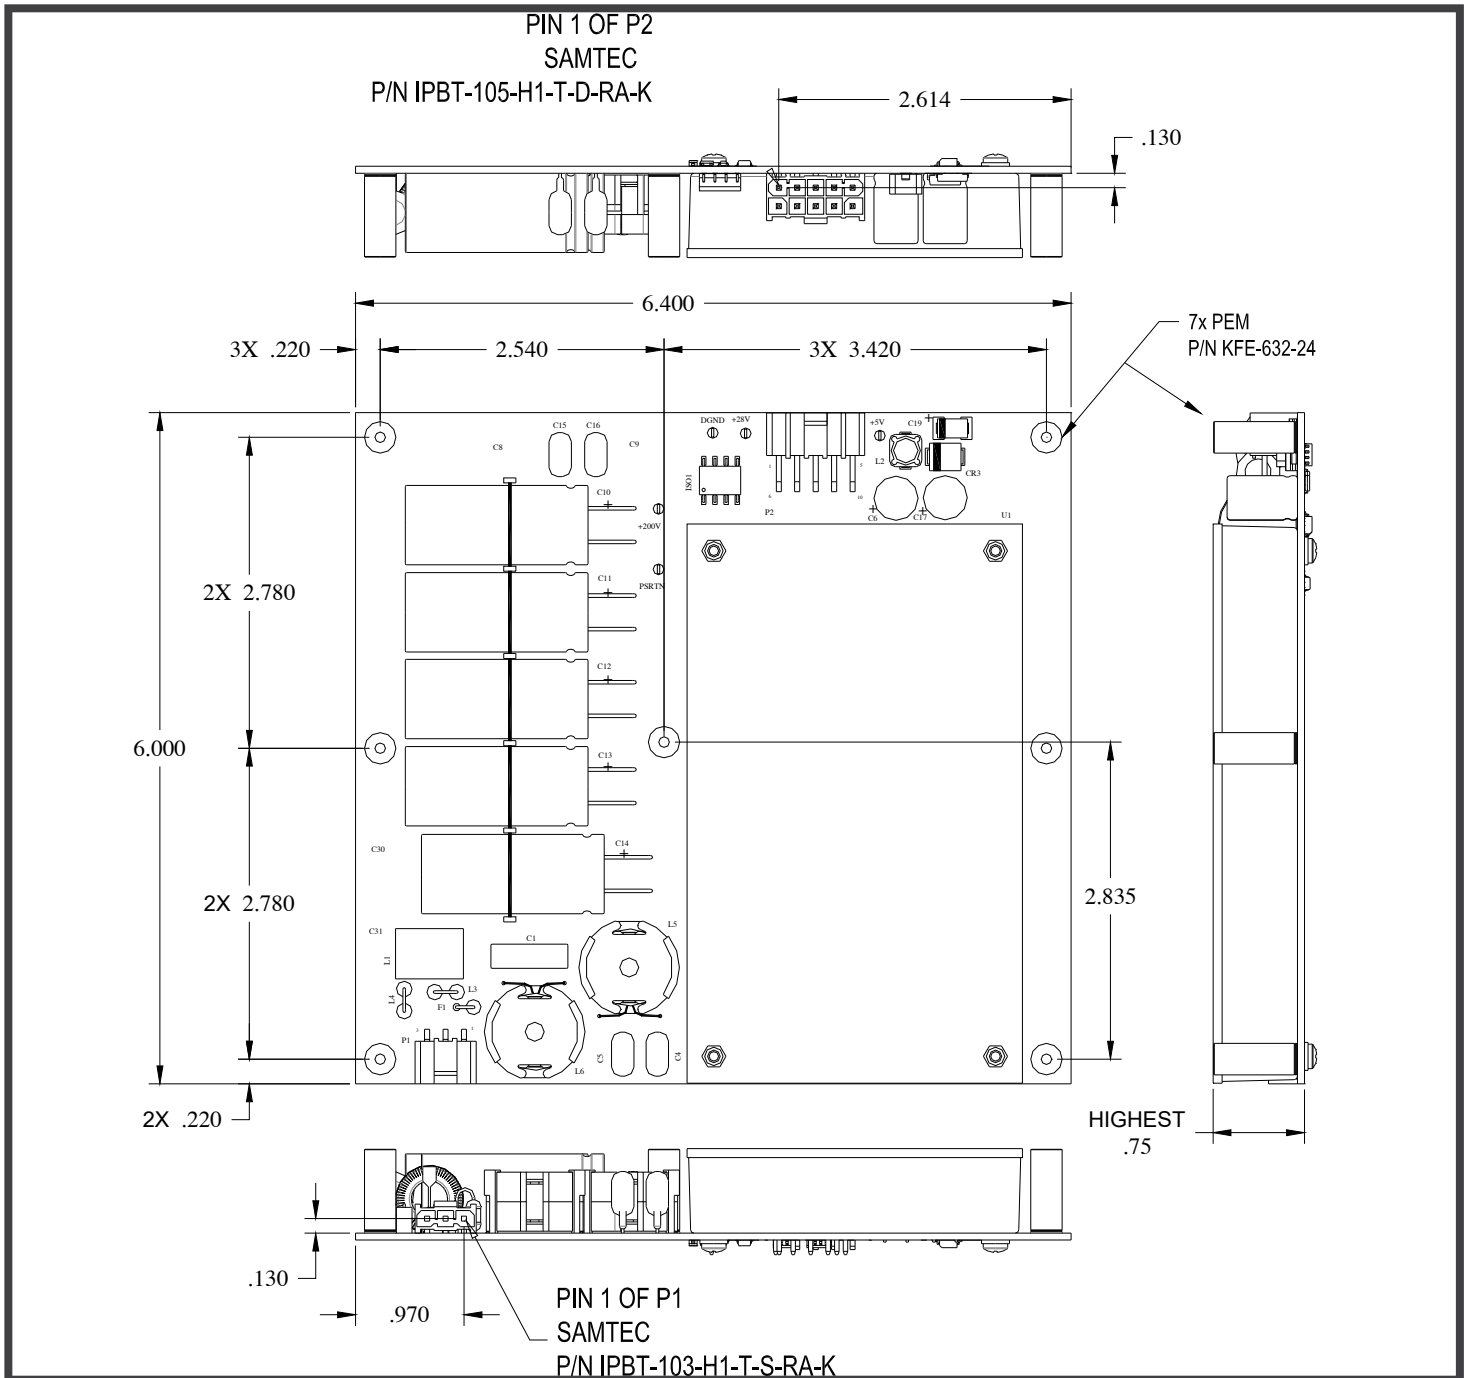

OUTLINE OR DETAILED SOLIDWORKS DRAWING FURNISHED UPON REQUEST



MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)

55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply



ELECTRICAL SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED THE FOLLOWING TEST CONDITIONS APPLY: Ta = 25°C. CONSTANT ACTIVE LOADS APPLIED TO OUTPUTS, Vin = 115Vrms/ 400Hz.

INPUT CHARACTERISTICS

PARAMETER	MS50W-12V-5V-PBF	REMARKS	NOTES
INPUT VOLTAGE RANGE	97 – 134Vrms	Complies with normal/ abnormal input voltages for AC operation per RTCA/DO-160G, Section 16, Category A.	2
MUST START VOLTAGE	97Vrms minimum	Supply will start and remained enabled for input voltage in the range of 97Vrms < Vin < 134Vrms.	2, 4
MUST INHIBIT VOLTAGE	88Vrms maximum	Supply output will inhibit following ~800mSec turn-off delay upon detection of input undervoltage ≤88Vrms. 12V output to disable monotonically and remain disabled as long as input voltage remains ≤88Vrms.	2
INPUT FREQUENCY RANGE	47 – 800Hz	Reduced distortion performance below 360Hz.	2
EFFICIENCY	77% minimum	Full output load, 78% typical full load efficiency.	2
POWER FACTOR	0.98 min	Pout > 30W at 400Hz, Pout > 35W at 800Hz.	2
INRUSH CURRENT	< 7Apk max	Cold or warm start; < 3Apk typical.	2
START-UP TIME	<750mSec	Outputs within regulation	2, 4
CONDUCTED EMISSIONS	RTCA/DO-160G	Section 21, category M.	1, 3
QUIESCENT POWER	6.5W typical	Pout = 0W.	2
STORAGE TEMPERATURE RANGE	-55°C to +100°C	Non-operational.	1
OPERATING TEMPERATURE RANGE	-40°C to +70°C	Observe maximum baseplate temperature of +100°C.	1
OUTPUTEN-L	Pull to >2.5Vdc with respect to DCRTN in order to disable the +12V output	Default state is pulled low with internal 10k pull-down. Pull to >2.5Vdc using ~5.1k pull-up resistor to 5Vstby in order to disable. 5Vstby output is unaffected by this signal.	2



MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)

55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply



INPUT CHARACTERISTICS—CONTINUED

PARAMETER	MS50W-12V-5V-PBF	REMARKS	NOTES
OVERTEMPERATURE SHUTDOWN	100°C ± 4°C	Module's 12V output is inhibited at or above 100°C. Auto restart occurs at ~80°C module baseplate temperature.	1
Athd INPUT CURRENT	< 5.5%	60% - 100% output load (30W - 55W).	2
INDIVIDUAL HARMONICS AC CLEAN	EVEN: <1% If / n (n < 10) EVEN: <0.1%If (n ≥ 10) ODD: <30% If / n ODD TRIPLES:<15% If /n	If = Fundamental current Vthd < 1.25% n = order of harmonic (1 - 40) 60% - 100% output load (30W - 55W). Harmonics < 10mA disregarded.	1
INDIVIDUAL HARMONICS DISTORTED INPUT	EVEN: <1% If / n + 1.25Vn (n < 10) EVEN: <0.1%If + 1.25Vn (n ≥ 10) ODD: <30% If / n + 1.25Vn ODD TRIPLES:<15% If /n+1.25Vn	If = Fundamental current Vthd > 10% (clipped method), n = order of harmonic (1 - 40) Vn = corr input voltage harmonic. 60% - 100% output load (30W - 55W). Harmonics < 10mA disregarded.	1



MS50W-12V-5V-PBF

(115Vac, 47- 800Hz Input)

55W/12Vdc, 5Vdc Dual Output, Airborne PFC Power Supply



OUTPUT CHARACTERISTICS

PARAMETER	MS50W-12V-5V-PBF	REMARKS	NOTES
RATED OUTPUT POWER	55W Continuous	Observe maximum allowable baseplate temperature; see PFC50W-12VPN-PBF specification application information for details.	2
OUTPUT VOLTAGE	+12.2V \pm 2% +5.0V \pm 2%	See "STANDARD OUTPUTS" table. 5V output may be +5.0V +3/-2% at no load.	2
OUTPUT OVERCURRENT THRESHOLD	12V output: 7A maximum 5V output: 750mA maximum	Output current will foldback for 12V output with pulse retry circuit, auto-recovery. No damage will occur to module during indefinite output short circuit conditions.	2
TEMPERATURE STABILITY COEFFICIENT	0.05% / °C	Output voltage variation with temperature (500uV / °C).	1
OUTPUT RIPPLE + NOISE (pk-pk)	<120mVpp: +12Voutput <50mVpp: +5Vstby output	20MHz Bandwidth. 50mVpp typical for 12Voutput. 10mVpp typical for 5Voutput.	2
MINIMUM OUTPUT LOAD	0A	No minimum load is necessary.	2
LINE REGULATION	<0.5%	Individual output deviation for \pm 20% step change in input voltage.	1
LOAD REGULATION (TRANSIENT LOAD RECOVERY)	Outputs remain within regulation limits	50% step change in output load. Full load to half load or half load to full load. 10uSec rise/fall time.	1
HOLD-UP TIME	300mSec minimum for Pout >55W	Uninterrupted ride through for momentary power interrupt.	2
ISOLATION VOLTAGE INPUT TO OUTPUT	1500Vac	No arcing or damage for 60 second test duration (7.2mArms max leakage).	2
ISOLATION VOLTAGE INPUT TO CHASSIS	1500Vac	No arcing or damage for 60 second test duration (7.2mArms max leakage).	2
ISOLATION VOLTAGE OUTPUT TO CHASSIS	0Vdc	Output DC return is tied to chassis ground with single point resistors	1
DC OUTPUT STATUS "DCPF-L"	Transitions to TTL low (0.5Vmax) when 12Vdc output is detected on low side of regulation band	TTL level, 3mA max sink current. Time to activation on a fault is 1mSec typical, 2.5mSec maximum.	2
AC POWER FAIL STATUS "ACPF-L"	Transitions to TTL low (0.5Vmax) upon detection of invalid input AC (\leq 88Vrms: 0% - 100% load)	TTL level, 16mA max sink current, 5mSec maximum delay time to activate on loss of input AC.	2
OUTPUT OVERVOLTAGE PROTECTION	12V: 13.3V \pm 3% (auto reset) 12V: 16V \pm 3% (latching) 5V output: n/a	Auto reset: Pulse by pulse protection Latching: requires input AC toggle to reset	1

Notes:

1. Ensured by design, not 100% tested in production.
2. 100% tested for specification compliance in production.
3. May require external differential/ common mode filter installed on power lines for full compliance.
4. Start-up time may exceed 750mSec at low line or at cold temperatures.

